
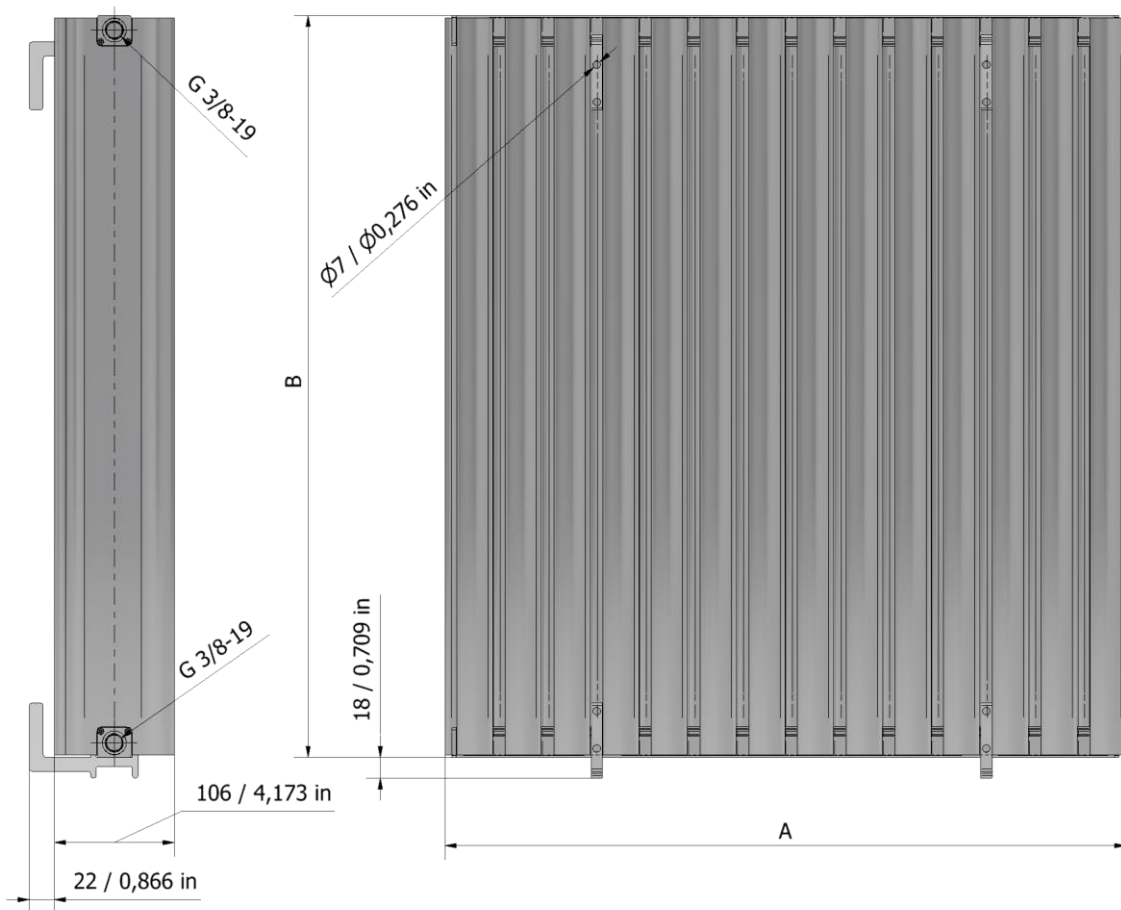


ESSE

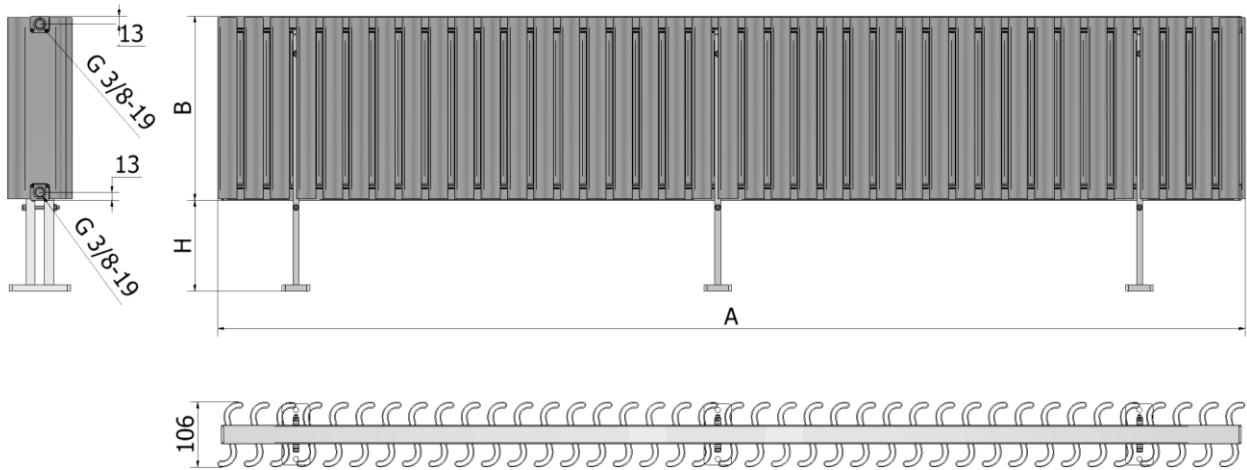

Heating power with $\Delta t=50^{\circ}\text{C } 122^{\circ}\text{F}$		Heating power with $\Delta t=30^{\circ}\text{C } 122^{\circ}\text{F}$		A		B		Heating surface		Weight		Water volume	
W	BTU/h	W	BTU/h	mm	inch	mm	inch	Sq m	Sq ft	Kg	lb.	l	US gal
3120	10639	1870	6376,7	1678	66,06	300	11,81	3,9	41,98	21,9	48,29	1,15	0,30
3600	12276	2160	7365,6	798	31,42	650	25,59	4,5	48,44	21	46,31	0,68	0,18
2706	9227	1624	5537,8	600	23,62	650	25,59	3,38	36,38	15,78	34,79	0,51	0,13
2541	8665	1248	4255,7	423	16,65	1400	55,12	3,67	39,50	22,26	49,08	0,82	0,22

Other dimensions available upon request